
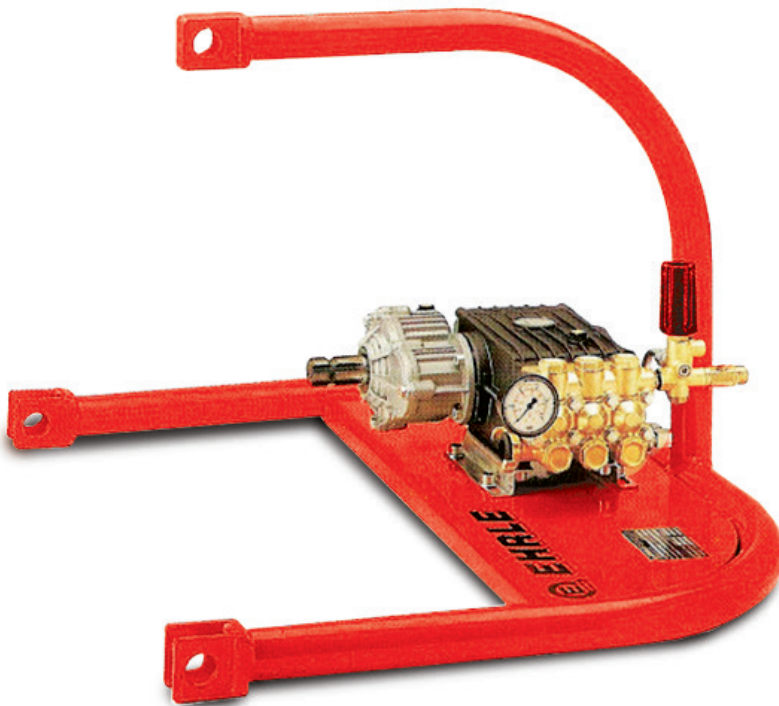



High Pressure Cleaner

Cold water, stationary - Series KW



Type	<i>KW1200 P.T.O. driven</i>		<i>KW1200 Hydraulic driven</i>	
Drive		P.T.O. Shaft: 525rpm - i: 1:1,9		Hydraulic Power: 36l/min @ 180bar
Power Consumption		6,5kW / 9hp		11kW / 15hp
Mounting / Connection		Plate Size 3 - P.T.O. 1 3/8"		2m DN16/BG3 - DN12/BG3
Operating pressure	30-180bar / 3-18MPa	<ul style="list-style-type: none"> ▶ 20m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Adjustable nozzle ▶ Stainless-Steel Jet-Nozzle 25° ▶ Spray-Lance 900mm c/w Rotary-Nozzle ▶ Detergent-Supply c/w Low-Pressure Injector and metering-valve 	<ul style="list-style-type: none"> ▶ 20m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Adjustable nozzle ▶ Stainless-Steel Jet-Nozzle 25° ▶ Spray-Lance 900mm c/w Rotary-Nozzle ▶ Detergent-Supply c/w Low-Pressure Injector and metering-valve 	
Max. pressure	200bar / 20Mpa			
Discharge capacity	300 - 1000l/h			
Nozzle size	050			
Max. Inlet temperature	45°C			
Pump speed	1000rpm			
Weight net / with package		-		-
Dimensions device / with package (LxWxH)		-		-
<p>Robust, corrosion-resistant, self-supporting device-plate for mounting size 3, made of robust steel pipe galvanized and powder-coated, triplex-piston pump with brass pump head, high-performance ceramic piston, stainless-steel valves, leakage-return, 2-fold safety system, unloader safety-valve c/w Infinitely variable pressure and quantity regulation and safety-valve, external detergent supply.</p> <p>P.T.O. gearbox for high-pressure pump size: 1 3/8" p.T.O.</p> <p>Hydraulic-drive: supply-line: DN12 c/w Coupling size GR3 - back-flow dn16 c/w Coupling size GR3 (pressureless)</p>				
Art. No.		201		204
Retail price plus VAT		3.309,00 €		4.119,00 €